

Uni-3 Series

PRICE COMPUTING
ELECTRONIC SYSTEM
SCALE PRINTER



Extraordinary power and exceptional value

With premium-class presets, fast print speed, and more labeling functions, you are getting more flexibility and more features – all for less cost than comparable price computing scales with printers.

With three models and two display types, you can easily find a Uni-3 to fit your specific application needs.

The power of the Uni-3 is at your fingertips with flexible preset buttons to represent PLUs, container tare values, label formats, images, and logos.

With two display types, the Uni-3 L1 model features a vibrant blue alphanumeric display with a sharp white 16-segment capability. The Uni-3 L2 model features a clear alphanumeric LCD display with one line alphanumeric and one line numeric only.

The UNI-3 model variants are available with two display types: The UNI-3 L1 models have a blue backlite display with sharp white 16-segment display capable of showing momentarily the PLU name and swap to numeric data; The UNI-3 L2 models, come with a two-line green/orange backlite liquid crystal display, one line dot matrix alphanumeric and one line numeric only.




L2 TYPE DISPLAY

L1 TYPE DISPLAY


Uni-3 L1 B Model

(unit:mm)

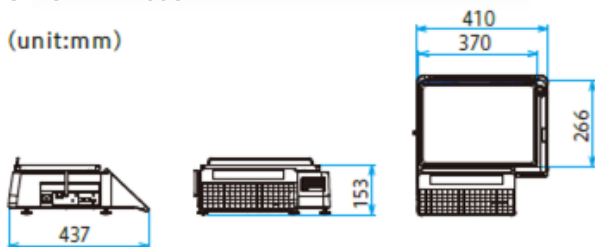

Uni-3 L2-Pole Model

(unit:mm)

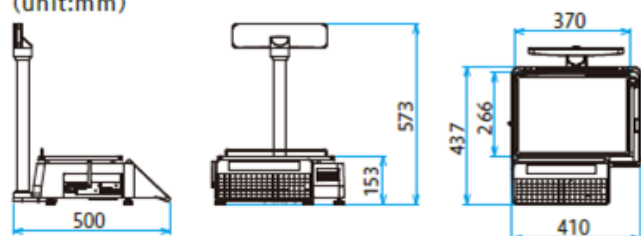

Standard Features

- NMI approved for trade use in Australia and is C-Tick / RoHS compliant
- Powerful receipt printing (POS mode) to operate with barcode scanner and cash draw
- Supplied with free easy to use scale management software, SLP-5 Lite
- Ingredient, Nutritional, Storage and Country of Origin labelling
- Back-up and restore the scale data using USB memory stick
- Graphics printing on labels and receipts
- Powerful batch printing feature
- Flash ROM for remote updating of application software
- Choice of large bright blue or, backlit LCD display

Options and Accessories

- SLP-5 scale management software, includes label design, data backup, remote diagnostics
- Link to barcode scanner and/or cash draw
- Link to many popular back office POS management systems

Specifications

- Capacity:** 6kg/2g, 15kg/5g (dual range)
- Display:** LCD blue alphanumeric : L1 (23 digits 16 segment) LCD backlit alphanumeric : L2 (192 x 16 dot matrix + 23 digits 7 seg)
- Print Speed:** MAX 100mm/sec (direct thermal paper)
- Label Size:** 38 - 64mm, Length 30 - 175mm, Print area W 56mm
- Label Roll Size:** Outer diameter 100mm or less, Inner diameter 40mm +/- 1mm
- Barcodes:** EAN/UPC, GS1, ITF
- Input/Output:** LAN x 1, USB x 1, Draw x 1
- Operating Environment:** -5 to 40 degrees C, 20 to 85% humidity. No condensation
- Power Supply:** AC100-240v, 50/60Hz
- Power Consumption:** Stand-by 50W, In Operation 100W
- Warranty:** One-year limited warranty



Heat and Control Pty Ltd
407 Creek Road • Mount Gravatt, Qld 4122 • AUSTRALIA
Tel: +61 7 3877 6333 • Fax: +61 7 3343 8371
icpsales@heatandcontrol.com.au • www.heatandcontrol.com